

FERCAS

DI CASALUCI VITO

**MATERIALI PER L'EDILIZIA E LA SIDERURGIA
SERVIZIO TRASPORTO E GRU**



**Zona Industriale - Tronco F - 73048 NARDÒ (Le)
Tel. 0833 578800 - Cell. 334 91 19 247**




info@fercas.it



FerCas di Vito Casaluci

LAMIERE GRECATE PER SOLAI


EGB 210

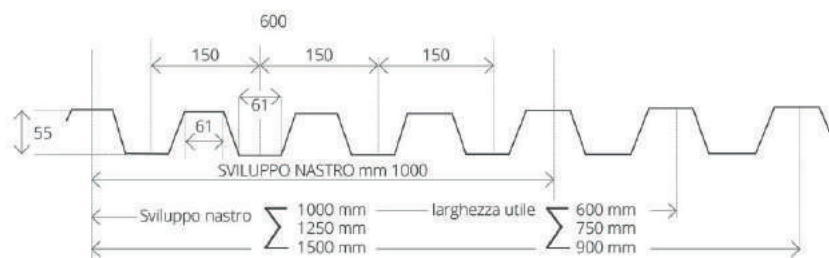

		caratteristiche statiche					
spessore mm		0,6	0,7	0,8	1,0	1,2	1,5
peso kg. / m ²	1000	7,85	9,15	10,46	13,08	15,70	19,62
	1250	4,71	5,49	6,28	7,85	9,42	11,77
	1500	5,88	6,86	7,85	9,81	11,77	14,17
peso kg. / mt.		7,06	8,24	9,42	11,77	14,13	17,66
		41,76	51,16	59,89	78,23	96,83	122,74
J cm ⁴ / mt.		14,37	18,06	21,59	27,66	33,31	41,31
W cm ³ / mt.							

LAMIERE GRECATE PER SOLAI


EGB 210/D con soletta collaborante

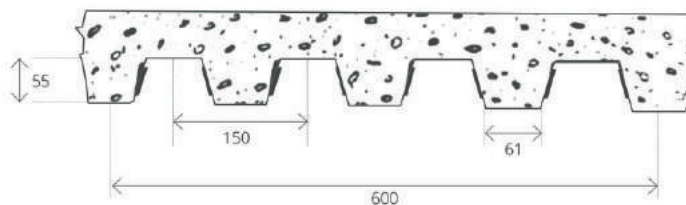

		caratteristiche statiche				
spessore mm		0,7	0,8	1,0	1,2	1,5
peso kg. / m ²		9,15	10,46	13,08	15,70	19,62
		5,49	6,28	7,85	9,42	11,77
peso kg. / mt.		50,05	59,15	77,63	96,48	122,52
		15,38	18,52	25,00	31,81	41,22
J cm ⁴ / mt.						
W cm ³ / mt.						

LAMIERE GRECATE PER COPERTURE E PARETI ZINCATE E PREVERNICIATE


EGB 401

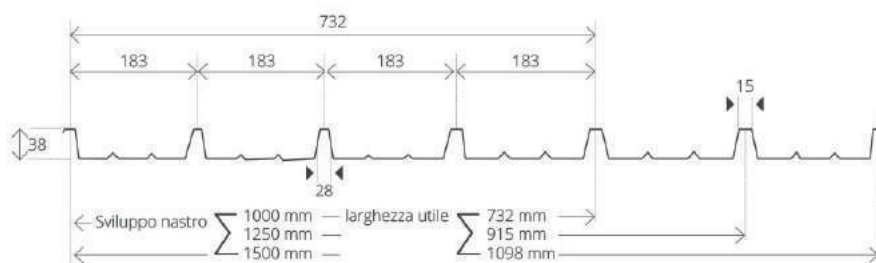

spessore mm	caratteristiche statiche			
	0,6	0,7	0,8	1,0
peso kg. / m ²	6,42	7,49	8,57	10,72
peso kg. / mt.	1000	4,71	5,49	6,28
	1250	5,88	6,86	7,85
	1500	7,06	8,24	9,42
J cm ⁴ / mt.	13,79	16,04	18,31	22,83
W cm ³ / mt.	4,75	5,55	6,36	7,98


LAMIERE GRECATE PER SOLAI COLLABORANTE CON SOLETTA COLLABORANTE

EGB 1200/D - solo su richiesta

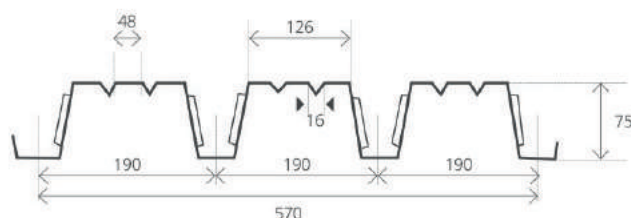

spessore mm	caratteristiche statiche					
	0,6	0,7	0,8	1,0	1,2	1,5
peso kg. / m ²	8,26	9,64	11,0	13,75	16,50	20,65
peso kg. / mt.	4,71	5,49	6,28	7,85	9,42	11,77
Jx / mt. ridotto cm ⁴ / mt.	83,3	100,6	117,30	148,5	179,1	222,3
Wx sup. cm ³ / mt.	29,5	37,1	44,1	57,5	70,2	87,2
Wx inf. cm ³ / mt.	17,8	21,0	24,2	30,2	36,2	44,9

LAMIERE ZINCATE ONDULATE

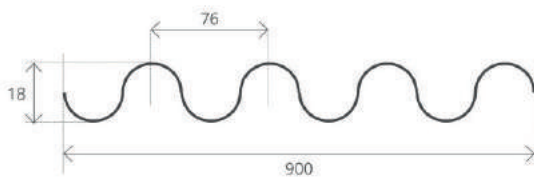

spessore mm	0,25	0,30	0,40	0,50	0,60	0,80	1,00
peso kg. / m ²	2,14	2,73	3,52	4,30	5,1	6,65	8,25